

A sailboat is shown on the water, with its sails partially visible. A black hydraulic backstay adjuster is overlaid on the image, extending from the bottom left towards the center. The background is a blue sky and sea. The text "Rigging matters." is written in a white, monospace-style font at the top left.

Rigging matters.

◀ **The NEW Integral Hydraulic Backstay Adjuster.**

Navtec provides solutions for every rigging challenge sailors face. From core parts such as turnbuckles and terminals to complete rod rigging and

hydraulic systems, Navtec designs, builds, and services the rigging components that bring out the best in a boat's performance.

NAVTEC[®]
Rigging SolutionsSM

www.navtec.net
E-mail: info@navtec.net

Ergonomics meets Economics.


As you increase rigging tension with the Navtec Integral Hydraulic Backstay Adjuster you'll experience immediate results. Forestay tension increases and the roller furling gear operates

more efficiently. Sail shape improves. You are able to sail faster and point higher. Combine these advantages with a new lower price and a higher level of sailing enjoyment is suddenly within reach.

- Longer stroke for modern masts
- Ergonomic gauge location
- Faster acting pump
- Five sizes to fit yachts 25' to 75'
- Competitively priced
- World wide sales and support

Rigging matters. So always demand Navtec.

The right rigging brings out the best in a boat's performance. So always specify genuine Navtec rigging parts. When you have questions concerning rigging go straight to the authority, www.navtec.net.

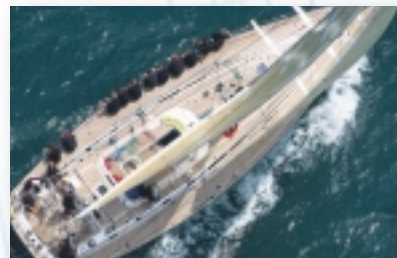

The Navtec Integral Hydraulic Backstay Adjuster will improve sail shape, roller furling, and overall windward performance.



Gauge location makes reading tension values easy and fast.

	Navtec-6 Integral 99	Navtec-10 Integral 99	Navtec-12 Integral 99	Navtec-17 Integral 99	Navtec-22 Integral 99
Piston Rod Size	1/2" / 13mm	1/2" / 13mm	5/8" / 16mm	5/8" / 16mm	3/4" / 19mm
Max Wire Size	7/32" / 5.6mm	9/32" / 7mm	5/16" / 8mm	3/8" / 9.6mm	7/16" / 11.2mm
Pin Diameter	7/16" / 11.2mm	1/2" -12.46mm	5/8" / 15.9mm	5/8" / 15.9mm	3/4" / 19mm
Length Open	44.64" / 1.134m	44.64" / 1.134m	47.7" / 1.212m	47.7" / 1.212m	50.52" / 1.283m
Length Closed	31.14" / 791mm	31.1" / 791mm	33.45" / 850mm	33.45" / 850mm	35.52" / 902mm
Stroke	13.5" / 343mm	13.5" / 343mm	14.25" / 362mm	14.25" / 362mm	15" / 381mm
Weight	7.8lb. / 3.5kgs	8.3lb. / 3.8kgs	16.4lb. / 7.4kgs	16.4lb. / 7.4kgs	23.3lb. / 10.6kgs

NAVTEC®
Rigging SolutionsSM

www.navtec.net
E-mail: info@navtec.net