



## Model 7018 Sail Boat Lock Valve

Many sail boat skippers prefer mechanical steering because they can feel the pressure on the rudder when they are sailing and that will, therefore, give them a much better feel of wind and weather conditions.

In order to satisfy the discriminating sailors, Kobelt developed the 7018 remote mounted lock valve. This valve fulfils all the wishes of a sail boat captain.

A regular good hydraulic steering system is equipped with a lock valve behind the hydraulic helm pump. This lock valve prevents any hydraulic pressure feedback going to the steering wheel.

Putting the remote lock valve 7018 in the open position will require the skipper to keep his hand on the wheel to affect a course and the pressure of the rudder can be felt at the steering wheel. By putting a remote lock valve into the closed position the rudder will remain where it was left without having to hold on to the wheel, the hydraulic oil is locked in the system and will maintain the given direction.

## **Ordering Information**


7018 can be ordered in either Black, White, Chrome or Polished bronze.

\* When ordering a pump to go with this unit, it must be ordered with a letter "P" (for porting block) e.g. 7005-ALP and should not be used in conjunction with the regular lock valve option.

## Summary

- Closed lock valve for heavy weather or following seas, lighter steering.
- Open lock valve for full feel of rudder.

## **MODEL 7018**

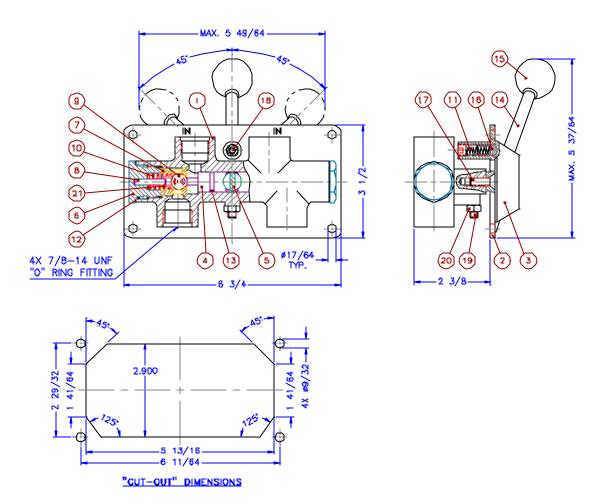

| Item | Qty | Part Number | Description     | Item | Qty | Part Number | Description      |
|------|-----|-------------|-----------------|------|-----|-------------|------------------|
| 1    | 1   | 7018-0001   | Lock Valve Body | 12   | 2   | 1101-0021   | "O" Ring         |
| 2    | 1   | 7018-0002   | Plate           | 13   | 2   | 1101-0014   | "O" Ring         |
| 3    | 1   | 7018-0003   | Hub             | 14   | 1   | 7169-0010   | Lever            |
| 4    | 2   | 7018-0004   | Shuttle         | 15   | 1   | 2030-0011   | Knob             |
| 5    | 1   | 7018-0005   | Shaft           | 16   | 1   | 2545-0012   | Detent           |
| 6    | 2   | 7012-0025   | End Cap         | 17   | 2   | 1015-1008   | Flat Hd Screw    |
| 7    | 2   | 7012-0026   | Ball Seat       | 18   | 1   | 1016-1204   | Socket Set Screw |
| 8    | 2   | 7018-0010   | Pin             | 19   | 1   | 1016-1116   | Socket Set Screw |
| 9    | 2   | 1301-0116   | Ball            | 20   | 1   | 1022-0211   | Hex Jam Nut      |
| 10   | 2   | 1201-0140   | Spring          | 21   | 2   | 7018-0031   | Spring Seat      |
| 11   | 1   | 1201-0062   | Spring          |      |     |             |                  |

